




HYDRAULIC TANK

A light tank to be mounted behind the cab.

- Produced in OE quality EN-5754, corresponding to the quality used by the car manufacturer
- The tank is approx. 60% lighter than a similar tank produced in steel
- Surface treatment not required
- Sight glass included
- Suction pipe 2½" - 2"
- Suction pipe can be rotated 360 degrees
- Placement of hydraulic tank behind the cab is optimal, as there will constantly be oil in the system available for the pump

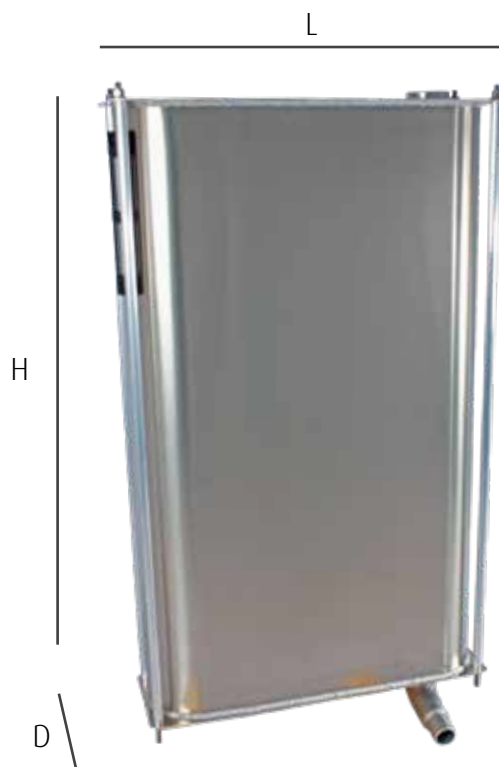

All tanks are supplied with sight glass and suction pipe. Return filter must be purchased separately.

Art. nr.	Size	Dimensions (mm)
905755	100L alu.	L 740 x H 789,7 x D 230
Filter: 572030	450mm 250L/min	
905751	120L alu.	L 740 x H 918,7 x D 230 (ORDER ITEM)
Filter: 572030	450mm 250L/min	
905752	160L alu.	L 740 x H 1397 x D 230
Filter: 572034	1050mm 250L/min	
905753	200L alu.	L 740 x H 1492 x D 230
Filter: 572034	1050mm 250L/min	
905754	250 alu.	L 930 x H 1507 x D 230 (ORDER ITEM)
Filter: 572034	1050mm 250L/min	